


MODEL EX-5 (FOR SS-30 OR SS-300D GATE)

In order to properly install the Expandable Gate you will use hardware from both the gate box and the T-BAR pack. Please follow these instructions carefully. The most important part is in **STEP ONE** – use the **HINGE BRACKET** from the **GATE BOX***.

If installing on masonry the T-BAR must be secured to the ground. You will need to drill and use masonry anchors.

The maximum span of the EX-5 is 85". If you need more length simply add more extensions. Please use one (1) T-BAR for every two (2) additional extensions. You may use either of our extensions, BX2 21 3/4" or BX1 10 1/2" in order to create the fence you require.

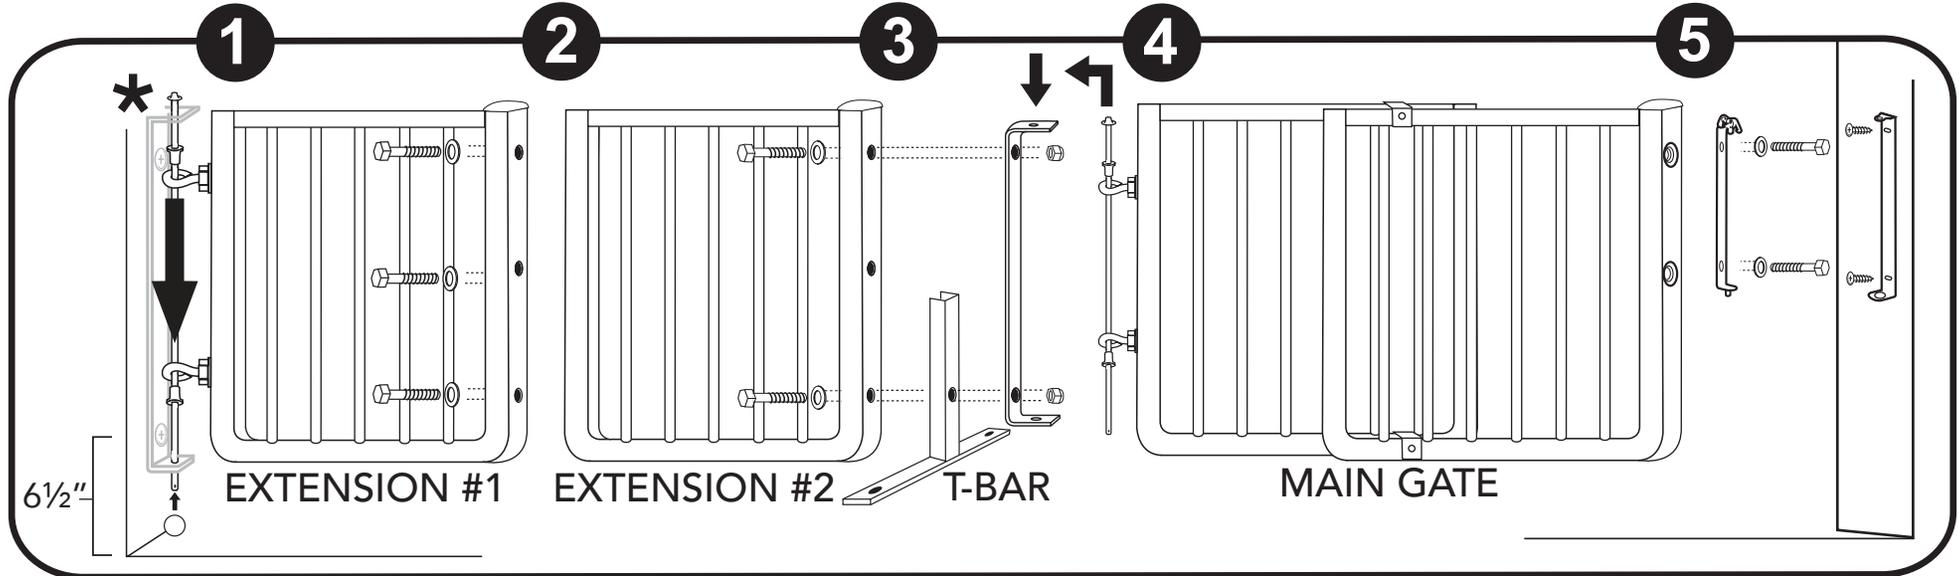

1 Use Hinge Bracket from Gate Box*. Drill a 1/8" pilot hole 6 1/2" from the floor. Secure hinge bracket to wall with screws from the gate box hardware pack. Attach eyebolts from the gate box to the upper and lower threaded inserts on one of the extension with nuts and washers.

Slide hinge rod and shoulder washers through the hinge bracket to secure the extension to the hinge bracket.

Finally, add key ring to the bottom of the hinge rod to secure.

2 Bolt the second extension to the first extension using three (3) of the 1 1/4" 1/4-20 hex head bolts.

3 For every two (2) EXTENSIONS you will need to install a T-BAR for stability. Place T-BAR on bottom of the second extension, lining up with the lower hole. Attach Hinge Bracket that came with the T-BAR on the end of the extension. Secure to end of the extension with two (2) 1 1/4" 1/4-20 hex head bolts lock nuts and washers. Secure T-BAR to floor with two (2) pan head screws.

4 Now follow MAIN GATE instructions beginning at STEP THREE using hardware in box, but instead of wall mount, attach to last EXTENSION.

5 Continue MAIN GATE instructions on how to install gate latch assembly to the far wall.

SCAN FOR AN INSTRUCTIONAL VIDEO

